

Mechanical	
Dimensions	120 x 76 x 21 mm (4.7 x 3.0 x 0.8 inches)
Housing	Moulded polycarbonate
Mounting	Suitable plain surface
Fixing	4mm., maximum diameter +UK/EU/US electrical back box
Environmental	
Operating temp'	-35°C to +66°C
Humidity	85±5% at 30±2°C (86±3°F)
Ingress	IP65
Electrical	
Voltage	see table below
Current	see table below
Data Voltage	Rest >4Vdc / Active <1Vdc
Data output	see table below
Indication	1 RGB LED
Sounder	Integral speaker
Termination	Screw - see DATASHEET: TERMINAL CONNECTIONS



LEGIC PARTNER
prime / advant



Registered Partner
MIFARE Classic®
MIFARE®DESFire®
CSN or Sector data




Our 125kHz Proximity readers are capable of supporting:

- EM variants
- HID® Proximity Compatible
- KANTECH Compatible
- FARPOINTE Compatible
- AWID Compatible
- CASI Compatible

... and other widely used 125kHz Proximity technologies.



base model No.	frequency	current mA	voltage Vdc	terminal connection	technology	RFID card	keypad output	optical tamper	Wiegand Clock&Data	OSDP	CE WEEE RoHS	FCC	UL
RX300	125 kHz	115	5 - 12	A	HID® Prox + EM variants	PC03			•		•		
RX380	13.56 MHz 125 kHz	200	5 - 12	A	MIFARE® Sector + HID® Prox	PC08			•		•		
RX360	13.56 MHz 125 kHz	75	10 - 16	B	LEGIC® + HID® Prox	PC06		•	•	•	•	•	•
RX390	13.56 MHz 125 kHz	75	10 - 16	B	MIFARE®DESFire® + HID® Prox	PC09		•	•	•	•	•	•

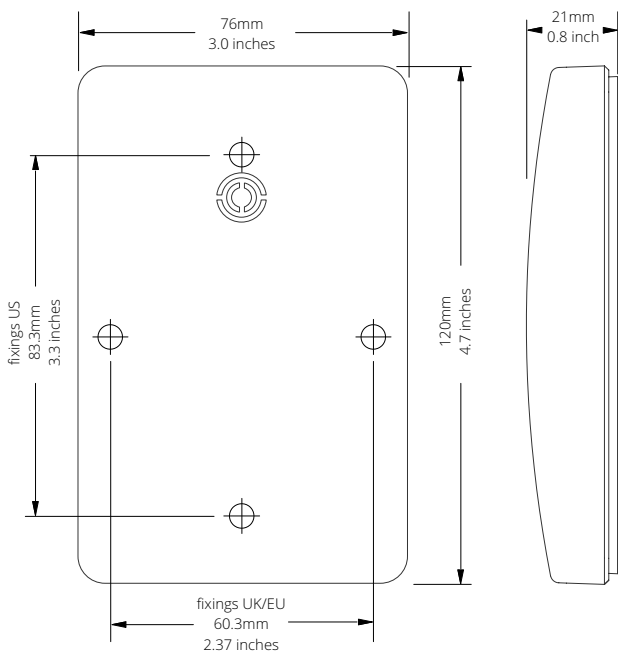

Key features

- Multi-technology
- UK design and manufacture
- Black high gloss finish
- Slim profile
- RGB LED
- Fully encapsulated electronics
- Optical tamper switch (see table above)
- Wide range of output formats
- Read range up to 10cm (4 inches)
- 5 year limited warranty

PLEASE CALL **+44 (0) 1495 751 992** to discuss your CUSTOM CONFIGURATION or LEGIC® reader requirements.

'MIFARE', 'MIFARE Classic' and 'MIFARE DESFire EV2' are trademarks of NXP B.V.