


Solo 2 PCB only

Part Code: AC-3300-PCB

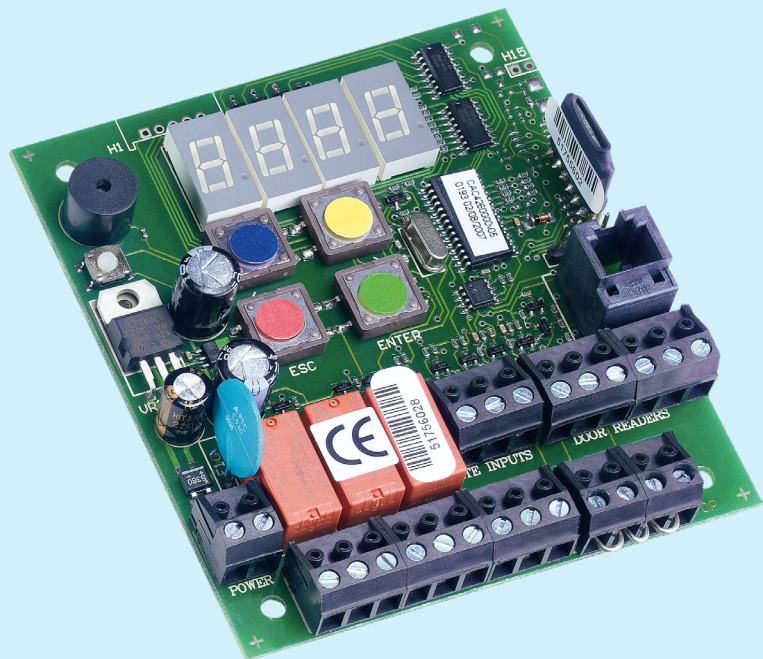

The Solo 2 from Controlsoft is a standalone Access Control Unit, providing cost effective access control for two door applications using Wiegand readers. Up to four readers can be connected giving you IN/OUT readers for two separate doors.

This unit is compatible with Wiegand readers, such as Controlsoft, HID or other 3rd party readers or keypads.

Features and Benefits

- Standalone Two Door Solution
- Unit includes a Removable Memory Stick to Backup or Copy All Data
- Supports up to 2000 Users
- Add or remove users via the on-board display and buttons
- Option for “Reader In” or “Reader In and Out” on each door
- Latched or Pulse Mode
- On-board RJ11 Connector for Local Enrolment Reader (Part Code AC-3301)
- AntiPassBack across doors

Technical

- 12Vdc @ 50mA
- Removable Terminal Blocks for Ease of Installation
- 4 x Inputs for Request to Exit Buttons and Door Contacts.
- 3 x Relays for Locks and Siren.
- Up to 4 Wiegand Readers (Read In & Out on Both Doors)
- Dimensions: 104mm x 90mm x 20mm
- Operating Temperature: -20°C to +60°C
- Operating Humidity Range: 5% to 95%
- 2 Year Warranty
- Boxed Weight: 200g

Part Number: AC-3300-PCB